

## **Commercial Trough Sinks**

*6944-2000 Series Installation Guide*




### **IMPORTANT!**

*We highly recommend reading through the entire installation guide prior to starting installation. If you have an questions, we're glad to help.*

## 1) Install Z-Clips


The first step will be to mount the Z-Clips on the wall. In the illustration below we've supplied measurements that will help you located where you will mount these on the wall. The mounting hole on the Z-Clip will need to be mounted **2.75"** above the intended height of your counter. There are two Z-Clips included in the parts box for your 6944-2000 series trough sink. We recommend mounting these centered at the two faucet locations. Z-Clips can be mounted with up to 1/4" Anchors. *Anchors are provided by the installer.*

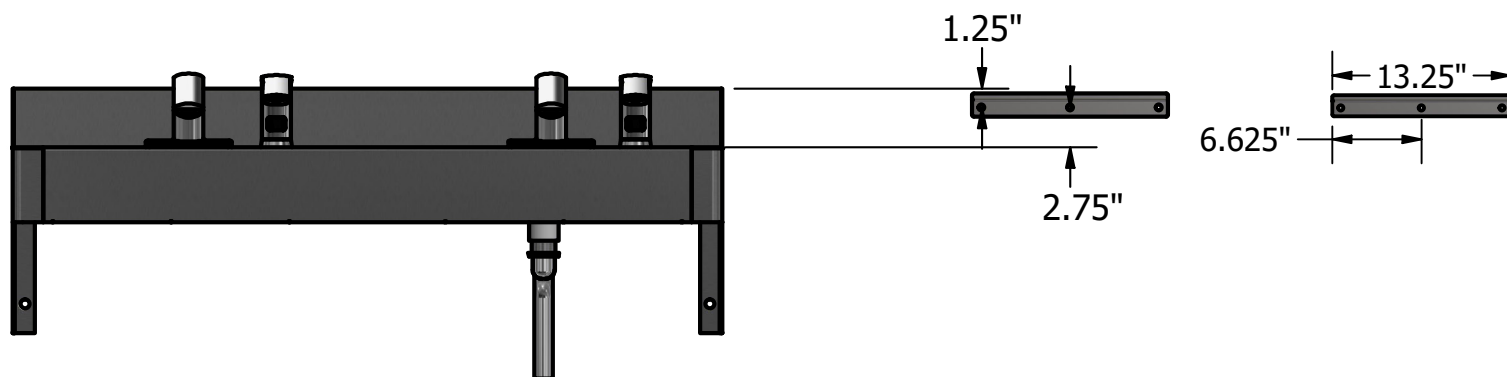

## 2) Mark Mounting Locations

With the Z-Clips Installed, they will provide some support for the unit. You can now lift the unit onto the Z-Clips and position the fixture where you want it. After positioning the trough sink, mark the mounting locations for the fixture. The fixture is not secured at this time so you will need assistance to ensure the sink does not get knocked off the Z-Clips. After you have marked the mounting locations then you will want to remove the fixture to install the anchors. The fixture sides can be mounted with up to 1/2" Anchors. *Anchors are provided by the installer.*

The illustration to the right also provides dimensions to the center of these mounting locations. Upon request you can also purchase a metal template that will provide all mounting locations.

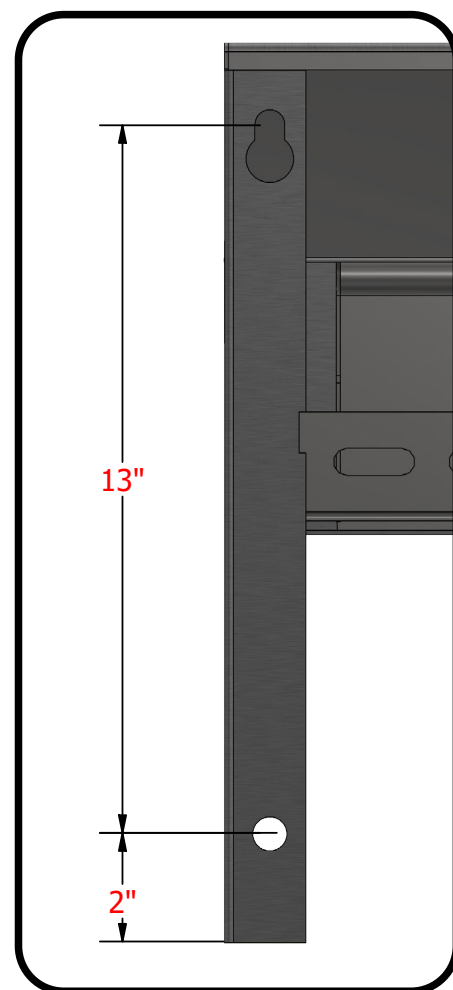


**6944-2000 Series Installation Guide****3) Mount the Fixture**

With the anchors installed in the wall you're now ready to lift the fixture back on the Z-Clips. Proceed to secure the fixture using the four mounting locations, two on each side of the fixture.

**4) Additional Mounting Points**

In addition to the two Z-Clips and the four mounting locations on the fixture, there are additional mounting locations on the back brace. This brace serves dual purposes, both keeping the unit square and providing a series of slots that can be used as additional mounting locations. These slots accommodate up to 1/2" Anchors. *Anchors are provided by the installer.*

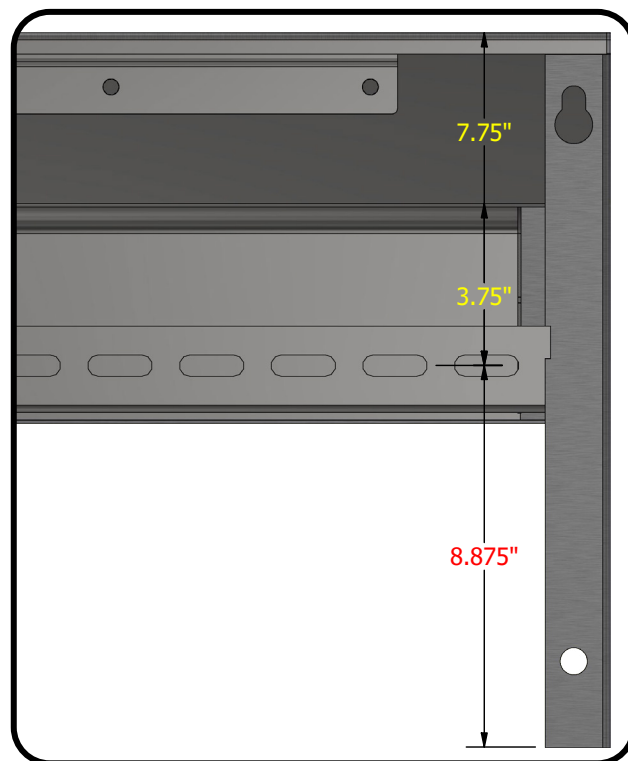**5) Install Drain and Faucets**

The fixture is now fully secured and ready for the drain and faucets to be installed. The output location of the standard drain(A261) is shown in the illustration to the right.

