

COMBINATION FIXTURE - 3155 R&L


Item: _____



Unit may be pictured with some optional features.



WARNING: Cancer and Reproductive Harm
- www.P65Warnings.ca.gov.

- 1.6 gpf (6.0 Lpf) Fixtures - 3" waste connection**
- ☐ **3155-R** Back supply connection 1¹/₂" (38mm) FIPT.
- ☐ **3155-L** Back supply connection 1¹/₂" (38mm) FIPT.
- 1.28 gpf (4.8 Lpf) Fixtures - 2-3/8" waste connection (WaterSense)**
- ☐ **HET3155-R** Back supply connection 1¹/₂" (38mm) FIPT.
- ☐ **HET3155-L** Back supply connection 1¹/₂" (38mm) FIPT.
- **Chase mounted cabinet, wall outlet waste.**
 - **Lavatory Basin-**
 - Rectangular.
 - Fast drain.
 - Air circulating self draining soap dish.
 - 4" (102mm) high backsplash.
 - 1¹/₄" (32mm) OD elbow sink waste with air vent, plain end extended 4" (102mm) past back of fixture for slip type connection.
 - Drip Dimple.
 - **Toilet Bowl-**
 - Elongated.
 - High polished integral seat.
 - Self draining flushing rim.
 - Blowout flushing action.
 - Fully enclosed trap.
 - Bead blast inside and underneath bowl.
- 



WaterSense certified when used with a
certified high-efficiency flushometer

► DESCRIPTION

This Combination Lavatory/Toilet Fixture is designed for areas with an accessible pipe chase. Fixtures are fabricated using 14 gauge type 304 stainless steel, welded to form a vandal resistant unit. Internal piping is stainless steel. Exposed surfaces are polished to a satin finish, except for the integral seat which is polished to a bright finish.

► PERFORMANCE STANDARDS

Metcraft's standard toilet is a 1.6 gpf (6.0 lpf) fixture with a 3" (76mm) waste outlet. Metcraft offers a "High Efficiency Toilet" (HET) 1.28 gpf (4.8 lpf) with a 2 3/8" (60mm) waste outlet as an option. Metcraft bowls and assemblies are designed to withstand 5000 lb. (22kN) loading without permanent deflection and damage. This fixture meets or exceeds ASME A112.19.3 / CSA B45.4 standards for "Stainless Steel Plumbing Fixtures". The trap will pass a 2 1/8" (54mm) dia. ball. A minimum 1" (25mm) supply providing 35psi (241kPa) flushing pressure is required.

Listed by



► INSTALLATION

An accessible pipe chase is required. Six anchor rods screw into sockets on back of the fixture. Anchor rods pass through the wall and are secured with washers and hex nuts on the chase side of the wall. No exposed fasteners are used. The installer must provide wall openings for anchor rods and piping per rough-in drawings provided by Metcraft. Valves should be installed in the pipe chase. Fixture is handicap compliant when installed per guidelines for accessibility.

NOTE: A security frame (wall sleeve) is recommended when installed on a new block (CMU) or poured concrete wall. A security frame is not appropriate for hollow wall construction.

Water Consumption:

With a low consumption flush valve - 1.6 gpf (6 liters)

With a HET consumption flush valve - 1.28 gpf (4.8 liters)

RECOMMENDED FLUSH VALVES

	SLOAN	ZURN	DELANY
Low consumption	952-MBPM-1.6	ZH6152-MBPM-1.6	1234-1.6
HET	952-MBPM-1.28	ZH6152-MBPM-1.28	

WALL THICKNESS AND TYPE (Must Specify)

Thickness: _____ Type: ☐ Concrete ☐ Block ☐ Steel

OUTLET/MOUNTING

- ☐ **FW** On the floor, wall outlet (Standard).
☐ **OW** Off the floor, wall outlet.
☐ **FF** On the floor, floor outlet.

SPOUT

- ☐ **B1** Filler/Bubbler Spout.
☐ **B1H** Suicide Resistant Filler/Bubbler Spout.
☐ **B2** Filler/bubbler Spout with mouthguard.
☐ **B3H** Suicide Resistant Filler Spout.

HAND BASINS

- ☐ **RB** Rectangular Basin.(Standard)

LAVATORY WASTE

- ☐ **EPE** Elbow Waste Plain End. (Standard)
☐ **EPL** Elbow Waste Plain End through the wall.
☐ **ET2** Elbow Waste.
☐ **PPE** P-Trap Plain End.
☐ **PPL** P-Trap Plain End through the wall.
☐ **PT2** P-Trap.
☐ **CW0** Combined Waste.

TOILET WASTE

- ☐ **PE** Plain End Waste - 4" off fixture. (Standard)
☐ **PL** Plain End Waste - 3" into Chase.
☐ **GW** Gasket Waste Outlet.

PRODUCT OPTIONS

- ☐ **AFH** Hydraulic Anti-Flood Valve.
☐ **MS** Mirror Finish Toilet Seat. (Standard)
☐ **MA** Ligature Resistant Skirt.
☐ **HT** Towel Hook.
☐ **TB** Toothbrush Holder.
☐ **OF** Overflow Vent.
☐ **VG** Vent Grille

NO-HUB CONNECTORS

- ☐ **A210-3** 3" s/s to 3" CI 1.6gpf No-hub Connector.
☐ **A210-1** 3" s/s to 4" CI 1.6gpf No-hub Connector.
☐ **A210-9** 2-3/8" s/s to 3" CI 1.28gpf No-hub Connector.
☐ **A210-8** 2-3/8" s/s to 4" CI 1.28gpf No-hub Connector.
☐ **A215-3** 3" No-hub Test Tee.
☐ **A215-4** 4" No-hub Test Tee.
☐ **A216-3** Pinned Cleanout Plug 3"
☐ **A216-4** Pinned Cleanout Plug 4"
☐ **A205-1** 1-1/4" (32mm) s/s to 1-1/2" (38mm) Copper.
☐ **A205-2** 1-1/4" (32mm) s/s to 1-1/2" (38mm) PL/ STL.
☐ **A205-3** 1-1/4" (32mm) s/s to 2" (38mm) CI.

OPTIONS/ACCESSORIES

- ☐ **A120** Security Frame. (Wall Sleeve/Can)
☐ **A168** Metal Template for Wall Openings.
☐ **TSC** Toilet Seat Cover
☐ **A247** Flush Valve thru wall connector.
☐ **A552** Wall Grab Bar.
☐ **A552LR** Wall Grab Bar w/ Closure Plate.
☐ **A557** Fixture Grab Bar.
☐ **A557LR** Fixture Grab Bar w/ Closure Plate.
☐ **FCS** Fixture Closure Shelf.

LAVATORY WASTE EXTENSIONS

- ☐ **A235** Trap Assembly. (For 1.5" female connection)
☐ **A240** Waste Extension for 1-1/2" female connection.

PNEUMATIC VALVE ASSEMBLIES (0.5 GPM Flow Valves)

- ☐ **A311** Single Temperature, Single Fixture Valve.
☐ **A312** Dual Temperature, Single Fixture Valve.


WALL MOUNTED TOILET PAPER HOLDERS (HC Compliant)

- ☐ **A720** Chase Mounted Recessed Toilet Paper Holder.
☐ **A721** Front Mounted Recessed Toilet Paper Holder.
☐ **A722** Ligature Resistant Front Mounted Recessed Toilet Paper Holder.


COMBINATION FIXTURE - 3155 R&L

Item: _____

3155-L Configuration

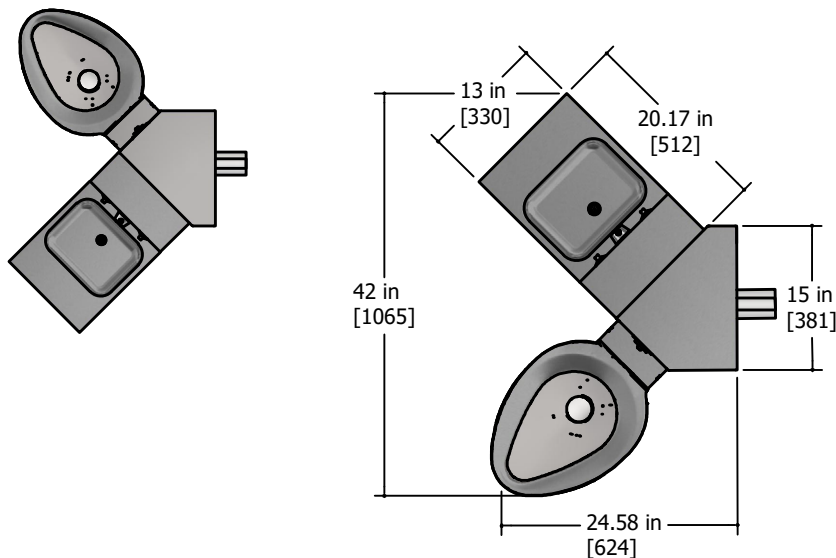

3155-R Shown Below

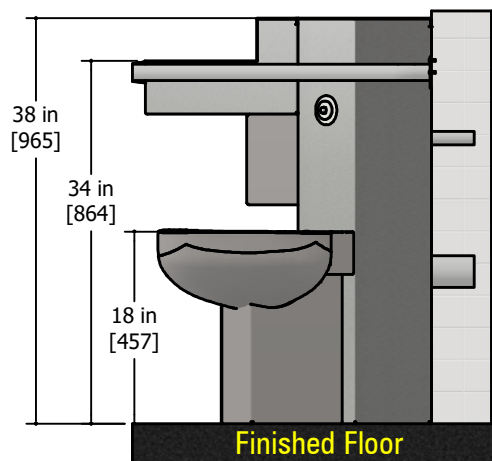

Due to continuous product improvement Metcraft reserves the right to make changes in design and specifications without prior notice. All dimensions should be verified with the factory for current information.

**APPROVED FOR
MANUFACTURING**

Company: _____ Name: _____
 Signature: _____ Date: _____

A.D.A. CHASE STYLE REFERENCE

- ☐ **A557** (Rear)
- ☐ **A552** (Sidewall)



20.25 in [514]
(REF)

14.83 in [377]
Reach Distance

8 in [203] MIN ADA
Knee Clearance

27 in [686] MIN ADA
Knee Clearance

29 in [737]

34 in [864]
MAX ADA

9 in [229] MIN
Toe Space

6 in [152] MIN ADA
Toe Space w/
Floor Space

11 in [279] MIN ADA
Knee Clearance

17 in [432] MIN ADA
Clear Floor Space
Under Lavatory

Finished Floor

Fixture Body

Minimum Knee and Toe
Clearance Area