

DRINKING FOUNTAIN FIXTURE - 5695

Item: _____



Unit may be pictured with some optional features.

STANDARD FEATURES

- **Front mounted fixture, wall outlet waste.**
- **Splash basin-**
 - Deep rectangular splash basin
 - Multi-hole integral drain.
- Heavy duty chrome plated vandal resistant bubbler head.
- Security type pushbutton pneumatic control valve with .5 GPM flow restrictor.
- Stainless Steel access panels.
- Exposed screws are stainless steel tamperproof.



WARNING: Cancer and Reproductive Harm
- www.P65Warnings.ca.gov.

► DESCRIPTION

The two station dual height drinking fountain model 5695 is used in commercial applications. This unit is designed to accommodate handicap and regular use. Construction is of heavy gauge type 304 stainless steel with exposed surfaces polished to a #4 satin finish. The bottom access panels are removable and secured with stainless steel tamper resistant screws. Fixture is furnished with two security type chrome plated lead free brass bubbler heads, pneumatic pushbutton control valves with .5 GPM flow control. Valve is installed inside fixture. Pushbuttons require less than 5 lbs (2.2N) to activate valve.

► PERFORMANCE STANDARDS

This fixture meets or exceeds ASME A112.19.3 / CSA B45.4 standards for "Stainless Steel Plumbing Fixtures".

► INSTALLATION

Supply and waste piping are roughed in at wall locations shown on drawings provided by Metcraft. Wall anchors (not furnished) must be embedded in the wall at mounting locations shown on drawings. The fixture is mounted to the wall using a hanger bracket and bolts furnished with the fixture. Piping connections are made through the removable bottom access panels, which are secured in place with the vandal resistant fasteners provided. Fixture meets A.D.A. requirements when installed per A.D.A. guidelines.

Listed by



SPOUTS

- ☐ **B6** Deck mounted bubbler.
- ☐ **B5H** Suicide Resistant Deck mounted bubbler. (Standard)
- ☐ **BV** Bubbler Valve w/ Mouthguard (This Bubbler does not require a pneumatic valve.)

OPTIONAL ACCESSORIES


- ☐ **A168** Metal Template for Wall Openings.
- ☐ **PCC** Powder Coat - Anti-microbial White.

PNEUMATIC VALVE ASSEMBLIES


- ☐ **A313** Single temperature, manifolded valve.(Standard)

DRINKING FOUNTAIN FIXTURE - 5695

Item: _____

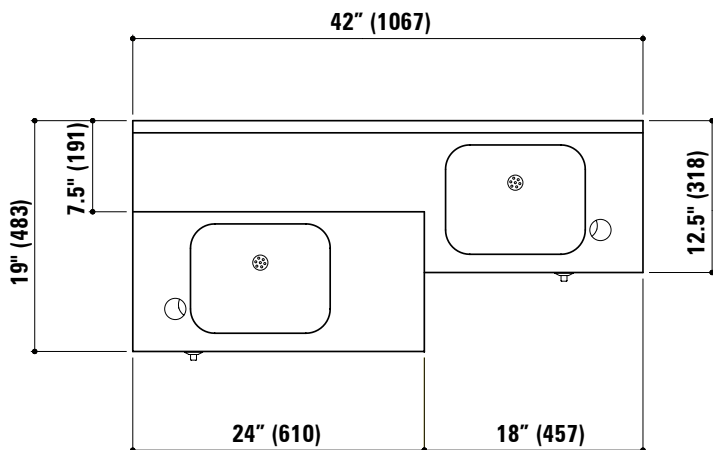

Due to continuous product improvement Metcraft reserves the right to make changes in design and specifications without prior notice. All dimensions should be verified with the factory for current information.

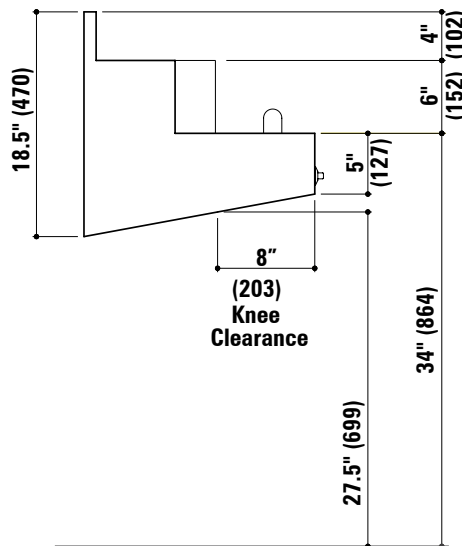

**APPROVED FOR
MANUFACTURING**

Company: _____ Name: _____
Signature: _____ Date: _____