


## **ACCESSORIES**


Item:	
ILUIII.	

## A620 RECESSED FLUSH VALVE ENCLOSURE

16-gauge, 304 stainless steel flush valve box with access panel, for recessed installation. Wall box is 13" (330mm) x 13" (330mm) x 6" (152mm) deep. Access cover is 16" (406mm) x 16" (406mm) 14-gauge stainless steel. Four tamper resistant stainless steel screws are provided.

Flush valve access boxes must provide a removable front cover to allow for maintenance. Therefore, we recommend that hydraulic actuated flush valves be used for this application. The hydraulic button assembly must be offset to avoid conflict with the flush valve body and the supply stop. Holes for piping and flush valve push button must be field cut.

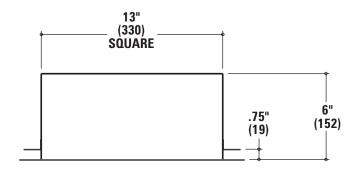

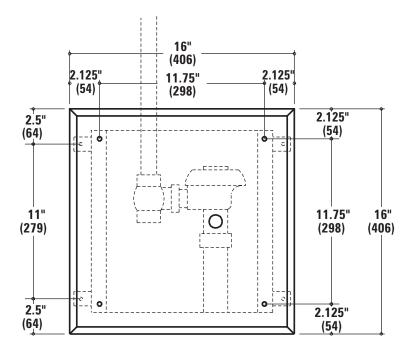

## FRONT OF RECESSED BOX MUST BE INSTALLED FLUSH WITH FINISHED WALL.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

Due to continuous product improvement Metcraft reserves the right to make changes in design and specifications without prior notice. All dimensions should be verified with the factory for current information.

APPROVED FOR	Company:_	Name:	
MANUFACTURING	Signature:		_Date: