

HIGH ABUSE FIXTURES

HAND WASH SINK - 6982

ltem:				



☐ 6982 Hand Wash Sink

STANDARD FEATURES

- Front Mounted, wall outlet waste.
- Fabricated using heavy gauge type 304 stainless steel.
- Two matching stainless steel angle brackets.
- 3/4" radiused coved corners.
- Die-stamped bottom for positive drainage.
- 1-1/2" diameter faucet holes on 8" centers.
- 3-1/2" die formed drain opening.

Unit may be pictured with some optional features.





WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.

▶ DESCRIPTION

The 6982 Hand Wash Sink is a commercial grade sink used for industrial hand washing. This sink is a wall mounted sink constructed of 14 gauge type 304 stainless steel. Overall sink size is $60'' \times 20''$ (1524mm x 508mm). The unit is seamlessly welded to form a one-piece unit. The sinks incorporate 3/4'' radius corners for easy cleaning. The sink is 8'' deep with a die stamped bottom for positive drainage. The back splash is 10'' high with a 2'' flange returned to the wall on 3/4'' radius. The front and sides have a 11/2'' rolled rim jointed into the backsplash. The drain hole accepts a 31/2'' drain. The faucet holes are 11/2'' on 8'' centers.

► INSTALLATION

This unit is mounted with a standard "Z" clip and two (2) matching stainless steel angel brackets securing the fixture to the wall.




HIGH ABUSE FIXTURES

DRAINS			FAU	CETS	
☐ A27	1 FI	at strainer drain 1-1/2" IPS outlet.		A301	Surgical Sink Faucet.
				A302	Single Sink Faucet.
LAVATOR	RY WASTE		VΔI	VE DIINCI	HINGS (1-1/2" diameter holes Per Station)
☐ SJP	В	rass slip joint P-Trap waste with cleanout 1-1/2" IPS	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	VE I GIVOI	
	01	itlet	=		Single Hole Centered
	U	outlet.			Two Holes: 4" Center to Center
					Two Holes: 8" Center to Center (Standard)
					Specify:

HAND WASH SINK - 6982

Item:

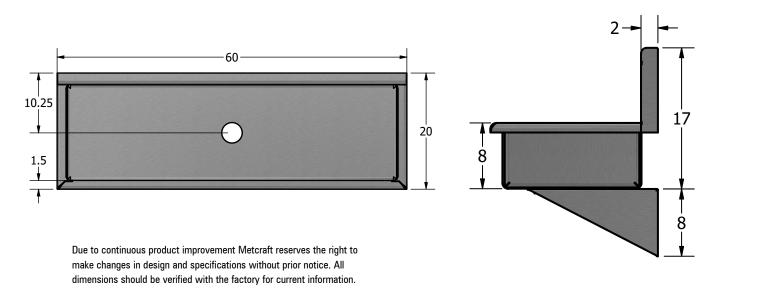

APPROVED FOR	Company:	Name:
MANUFACTURING	Signature:	Date: