

## LAVATORY FIXTURE - R5115-4-11-METCRAFT

**Item:** \_\_\_\_\_

**Replaces: CRANE 1-604**

Unit may be pictured with some optional features.



**WARNING: Cancer and Reproductive Harm**  
- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

 **R5115** Replacement for Vitrious China Sinks

## STANDARD FEATURES

- **Chase mounted fixture, wall outlet waste.**
- **Lavatory basin-**
  - Oval lavatory basin
  - Multi-hole integral drain.
  - 1-1/2" FIPT Elbow Lavatory Waste.
- 4" (102mm) high back splash.
- Integral soap tray with ribbed bottom.
- Integrally welded bottom enclosure.
- Penal Bubbler.

## ► DESCRIPTION

This lavatory fixture is designed for areas with an accessible pipe chase. The fixture is fabricated using 14 gauge type 304 stainless steel, welded to form a vandal resistant unit. Internal piping is stainless steel. Lavatory is designed with a 4" (102mm) high back splash and integral ribbed soap tray. Exposed surfaces are polished to a satin finish. Valves and valve outlets must be specified separately.

## ► INSTALLATION

An accessible pipe chase is required. The installer must provide wall openings for piping and valve operators per rough-in drawings provided by Metcraft. Valves should be installed in the pipe chase. Unit is designed to mount like a China fixture with pushbutton anchors and waste.

## ► PERFORMANCE STANDARDS

This fixture meets or exceeds ASME A112.19.3 / CSA B45.4 standards for "Stainless Steel Plumbing Fixtures".

Listed by



## WALL THICKNESS AND TYPE (Must Specify)

Thickness: \_\_\_\_\_ Type: ☐ Concrete ☐ Block ☐ Steel

## SPOUTS

- ☐ B1 Penal filler/bubbler.
- ☐ B1H Suicide Resistant filler/bubbler.
- ☐ B2 Filler/bubbler with mouthguard.
- ☐ B3H Suicide Resistant filler.

## HAND BASINS

- ☐ OB Oval Basin

## LAVATORY WASTE

- ☐ ET2 1-1/2" FIPT Elbow Waste.

## OPTIONAL ACCESSORIES


- ☐ HT Towel Hook.
- ☐ TB Toothbrush Holder.
- ☐ OF Overflow Vent.
- ☐ PCC Powder Coat - Anti-microbial White.
- ☐ Brace for T Head Anchor Bolt.

## PNEUMATIC VALVE ASSEMBLIES (0.5 GPM Flow Valves)

- ☐ A311 Single Temperature, Single Fixture Valve.
- ☐ A312 Dual Temperature, Single Fixture Valve.
- ☐ #35 Valve Anchors (One Required per Button Hole)  
(Pushbutton Anchors used for securing fixture)

NOTE: Often used with the A312 Valve & #35 Valve Anchors when using Metcraft Valves

### #35 Valve Anchors





### A312 Valve



**\*SOLD SEPARATELY\***

## LAVATORY FIXTURE - R5115-4-11-METCRAFT

Item: \_\_\_\_\_

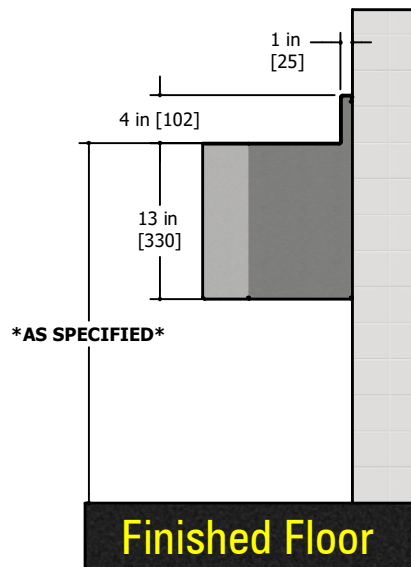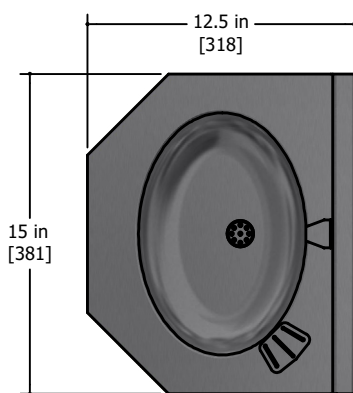

Due to continuous product improvement Metcraft reserves the right to make changes in design and specifications without prior notice. All dimensions should be verified with the factory for current information.

**APPROVED FOR  
MANUFACTURING**

Company: \_\_\_\_\_ Name: \_\_\_\_\_  
Signature: \_\_\_\_\_ Date: \_\_\_\_\_