


SHOWER PANEL - 8606 LR

Item: _____

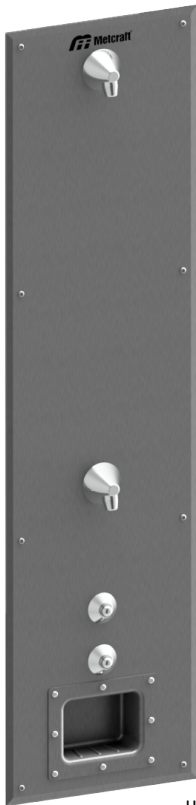

Unit may be pictured with some optional features.

- ☐ **8606-LR** Recessed, Handicap Ligature Resistant Shower Panel.

STANDARD FEATURES

- **Front mounted, flush mount fixture**
- Conical shower heads with vandal resistant adjustable spray.
- Recessed soap dish.
- Manifolded single temperature pushbutton pneumatic metering valve. One pushbutton controls upper shower head and a second pushbutton controls lower shower head.
- Customer specified flow control.
- Ligature resistant push buttons.
- **Hardware-**
 - Stainless steel vandal resistant mounting screws for front cover.
 - Recessed wall frame/box.



WARNING: Cancer and Reproductive Harm
- www.P65Warnings.ca.gov.



Certified by
QAI Laboratories

WaterSense certified showerhead
options available.

► DESCRIPTION

This front mounted shower panel is designed for areas without an accessible pipe chase. The panel is fabricated using 14 gauge type 304 stainless steel. Exposed surfaces are polished to a satin finish. Panel is secured to a stainless steel recessed wall frame using stainless steel vandal resistant screws. Valve connections are made to supply piping with flexible supply hoses before the panel is mounted to the wall frame.

► PERFORMANCE STANDARDS

This fixture meets or exceeds ASME A112.19.3 / CSA B45.4 standards for "Stainless Steel Plumbing Fixtures".

► INSTALLATION

The recessed wall frame is built into the wall structure as the wall is being erected. Supply piping must be roughed into the wall frame for final connection. The valve should be installed in the wall frame. Once the valve is connected, the shower panel is secured to the wall frame using the vandal resistant stainless steel screws. Fixture is handicap compliant when installed per guidelines for accessibility.

Listed by



Fixture designed to reduce possible ligature points. Not a substitute for professional supervision.

SHOWERHEADS - ABLE BODIED

- ☐ **PSH-1C** Conical Shower Head 30 dg.
☐ **PSH-2C** Conical Shower Head 17.5 dg.

SHOWERHEADS - HC

- ☐ **PSH-1C** Conical Shower Head 30 dg.
☐ **PSH-2C** Conical Shower Head 17.5 dg.

SOAP DISHES

- ☐ **SO** Recessed Soap Dish. (Standard)
☐ **NSO** No Soap Dish Option.

VALVE ASSEMBLIES

- ☐ **A313** Single Temperature, Manifoldd Valve.
☐ **A314** Dual Temperature, Manifoldd Valve.

MOUNTING FRAMES



- ☐ **HWB** Stainless Steel Wall Box (16 Ga)
☐ **HWF** Stainless Steel Wall Frame (16 Ga)
☐ **TWB** Galvanized Wall Box (20 Ga)

FLOW CONTROLS

- ☐ **WS** **WaterSense** certified flow.
☐ **FC20** 2.0 gallon per minute flow
☐ **FC25** 2.5 gallon per minute flow

SHOWER PANEL - 8606 LR

Item: _____

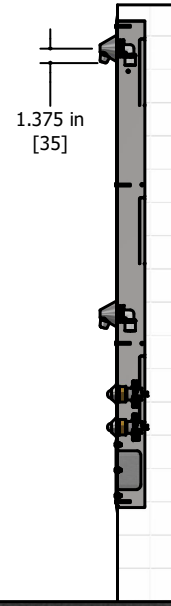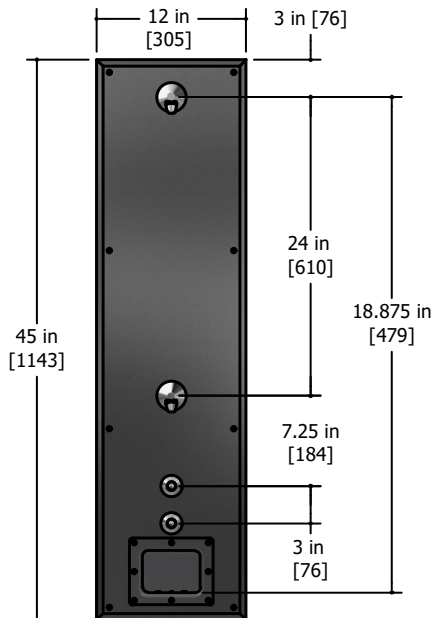

Due to continuous product improvement Metcraft reserves the right to make changes in design and specifications without prior notice. All dimensions should be verified with the factory for current information.

**APPROVED FOR
MANUFACTURING**

Company: _____ Name: _____
 Signature: _____ Date: _____