

**SHOWER FIXTURE - 8601W**

Item: \_\_\_\_\_



Unit may be pictured with some optional features.

☐ **8601W**

Wall Mounted Shower Fixture.

**STANDARD FEATURES**

- **Front mounted fixture**
- 17 1/2 degree security shower head with vandal resistant adjustable spray.
- Recessed stainless steel mounting frame.
- Recessed soap dish.
- Single temperature pushbutton pneumatic metering valve.
- 2.5 gallon per minute flow
- **Hardware-**
  - Stainless steel vandal-resistant mounting screws for front cover.



**WARNING:** Cancer and Reproductive Harm  
- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**► DESCRIPTION**

This front mounted Shower Panel is designed for areas without an accessible pipe chase. The panel is fabricated using heavy gauge type 304 stainless steel. Exposed surfaces are polished to a satin finish. Panel is secured to a stainless steel recessed wall frame using stainless steel vandal resistant screws. Valve connections are made to supply piping with flexible supply hoses before the panel is mounted to the wall frame.

**► INSTALLATION**

The recessed wall frame is built into the wall structure as the wall is being erected. Supply piping must be roughed into the wall frame for final connection. The valve should be installed in the wall frame. Once the valve is connected, the shower panel is secured to the wall frame using the vandal resistant stainless steel screws.

**► PERFORMANCE STANDARDS**

This fixture meets or exceeds ASME A112.19.3 / CSA B45.4 standards for "Stainless Steel Plumbing Fixtures".

Listed by



**SHOWERHEADS**

- ☐ **PSH-1** Shower Head 30dg.
- ☐ **PSH-2** Shower Head 17.5dg.
- ☐ **LBJ** Locking Ball Joint Shower Head.
- ☐ **DAS** Deluxe Adjustable Shower Head.

**SOAP DISHES**

- ☐ **SO** Recessed Soap Dish. (Standard)
- ☐ **A501** Surface Mounted Soap Dish.
- ☐ **NSO** No Soap Dish Option.

**VALVE ASSEMBLIES**

- ☐ **A311** Single Temperature, Single Fixture Valve.
- ☐ **A312** Dual Temperature, Single Fixture Valve.
- ☐ **205** Pressure Balanced mixing Valve.
- ☐ **205LR** Ligature Resistant Pressure Balanced mixing Valve.
- ☐ **204** Thermostatic/Pressure Balancing mixing Valve.
- ☐ **CS** Club Shower (Mixing Valve Plus Timed Pneumatic Valve)
- ☐ **LHD** Lever Handle Diverter Valve

**MOUNTING FRAMES**



- ☐ **HWB** Stainless Steel Wall Box (16 Ga)
- ☐ **HWF** Stainless Steel Wall Frame (16 Ga)
- ☐ **TWB** Galvanized Wall Box (20 Ga)

**FLOW CONTROLS**

- ☐ **FC12** 1.2 gallon per minute flow.
- ☐ **FC14** 1.4 gallon per minute flow.
- ☐ **FC20** 2.0 gallon per minute flow
- ☐ **FC25** 2.5 gallon per minute flow

## SHOWER FIXTURES - 8601W

Item: \_\_\_\_\_

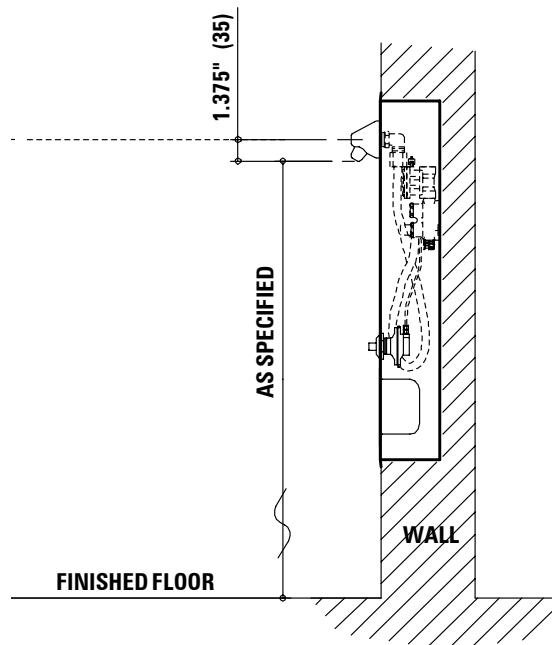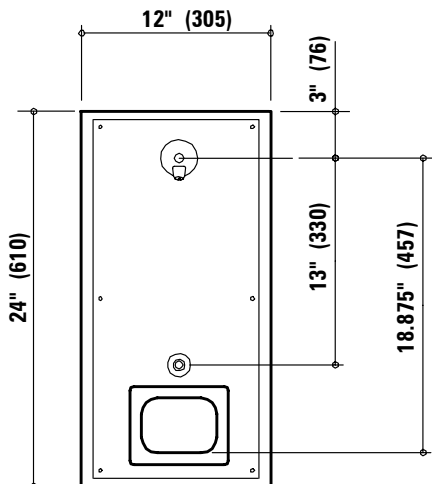

Due to continuous product improvement Metcraft reserves the right to make changes in design and specifications without prior notice. All dimensions should be verified with the factory for current information.

**APPROVED FOR  
MANUFACTURING**

Company: \_\_\_\_\_ Name: \_\_\_\_\_  
Signature: \_\_\_\_\_ Date: \_\_\_\_\_